


Data Sheet

VCR 180 MC

STIEBEL ELTRON

Centralised Heat Recovery Ventilation

Achieve healthy indoor air at home with quiet and efficient heat recovery ventilation

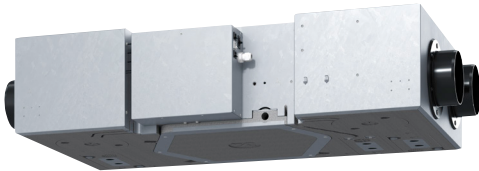

VCR 180 MC



FEB Controller

The advantages

- › Replaces indoor air with filtered fresh air from outside, ideal for asthma and allergy sufferers
- › Compact and discrete roof installation
- › Energy efficient with up to 87% heat recovery
- › Designed for air flow rates of 50 – 180 m³/h
- › Quiet operation
- › Includes FEB controller

		HEAT RECOVERY VENTILATION
MODEL NUMBER		VCR 180 MC
Heat recovery		Up to 87 %
Connection		1/N/PE ~ 230 V / 50 Hz
Max. current (230V) excl. preheating coil incl. preheating coil	A	0.46 5
Power consumption	W	105 – 1150
Air flow rate	m ³ /h	50 – 180
IP rating		IP20
Externally available max. static pressure differential	Pa	160 (at 180 m ³ /h)
Application range	°C	-15 – 40
Filter class		G4 (F7 Optional)
Air duct connection	mm	150
Condensate connection	mm	20
Sound power level (EN 12102)	dB(A)	33
Height	mm	248
Width	mm	520
Depth	mm	1113
Weight	kg	18


Warranty

For full warranty information please visit www.stiebel.com.au.

Technical Support

Stiebel Eltron (Aust) Pty Ltd
Free Call (Australia): 1800 153 351
Website: stiebel.com.au

VCR 180 MC Dimensions

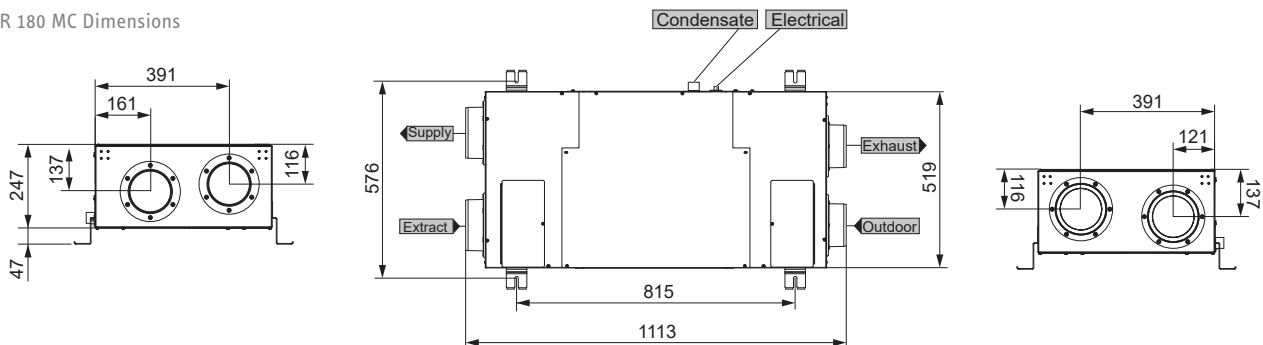

STIEBEL ELTRON is committed to our policy of continual improvement, some features may have subsequently been changed or even removed. Our advisors will be happy to consult with you regarding the currently applicable equipment features. The images used in this brochure are for reference only.